




ECOKOOL V FEATURES

THE ECOKOOL V COOLS BETTER AND REQUIRES LESS MAINTENANCE THAN CONVENTIONAL COOLERS.

1. PRO-4X4 MEDIA

Pro Series can deliver colder air than any other home comfort evaporative cooler.



2. PRO-ARMOR


The premier single inlet cooler with polymeric inner structure that completely shields the wet section from corrosive interaction.

3. RELIABLE LOW SUMP PUMP

This powerful low sump pump keeps your pads wet even when your sump runs low.


4. FLOMATE

Flomate-quality water distribution system improves wet out for more efficiency.



5. PRO-CLEAN SYSTEM

Drains and washes the unit daily and can save as much as 3,000 gallons of water a month as compared to standard bleed-off system.

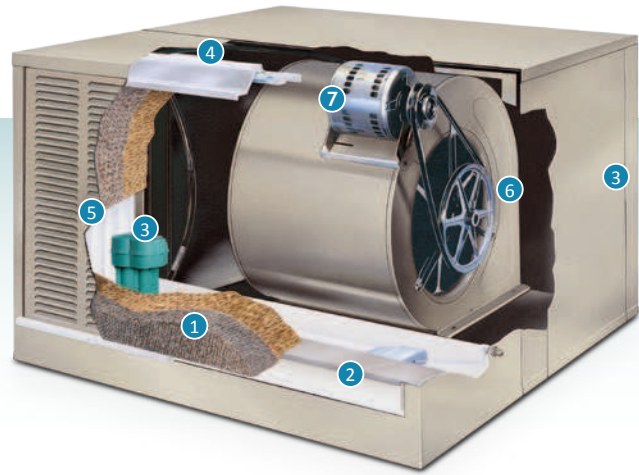

6. MIRROSCOPIC™ BLOWER SHAFT FINISHING PROCESS

This yields a 90% improvement over the industry standard "ground finish." This means quieter operation and longer bearing and shaft life for your cooler!



7. FACTORY INSTALLED VARIABLE SPEED MOTOR

All components are completely pre-wired by the factory, thus reducing installation time and increasing reliability.

8. PRO-SHIELD

This weatherizing panel prohibits outward heat loss and cold air from entering into your home during the off-season. Easy to install, media protection is also afforded thereby increasing the life of the unit.



SPECIFICATIONS

Model Number	Industry Standard Rating*	Duct	Air Delivery CFM (Cubic Feet Per Minute)					Electrical Specifications				
			0.0"	0.1"	0.2"	0.3"	0.4"	0.5"	HP	Speed	Volts	Max Amps
PVD6800	6800	Down	4430	4310	4135	3990	3695	3460	1	Variable	120	14.5
PVH6800	6800	Side	4430	4310	4135	3990	3695	3460	1	Variable	120	14.5


* Industry Standard Rating represents a numeric index for use in comparing units of different manufacturers.

ECOKOOL V Evaporative Coolers and components are designed and tested in accordance with one or more of the following standards or agencies. AIR DELIVERY - data published derived from tests conducted in accordance with A.M.C.A. (Air Movement and Control Assoc.) standard 210. EVAPORATIVE MEDIA - Specially Corrugated Cellulose Materials, impregnated with insoluble antirrot salts and regidifying saturants. SEALANT - water immersion per ASTM D870. FLEXIBILITY - per ASTM D756. CORROSION RESISTANCE - per ASTM B117. PENCIL HARDNESS - per ASTM D3363. IMPACT RESISTANCE - per D2794. FLEXIBILITY - per ASTM D522. SURFACE BURNING CHARACTERISTICS of building materials (best rating) per UL 723 and ASTM E-84. PUMPS recognized under UL standard #778 for operating water pumps with thermal overload and locked rotor protection. POLYMERIC MATERIALS listed in accordance with UL 94 and 746C. MOTORS recognized under UL component standard #1004 for motor certification. MOTORS tested under UL standard #507 for locked rotor and heat rise protection.


ECOKOOL V ENGINEERING DATA

Model Number	Cabinet			Duct Opening		E	F	G	I	J	O	M	P	S	Blower Wheel		Shaft Dia.	Belt Length	Pully OD	Oper. Weight	Ship Weight
	H	W	D	A	B										Dia.	W.					
PVD6800	34 5/16	42	45	19 3/4	19 3/4	17	28	5 1/2	25	13 1/2	13 1/4	13	3 5/16	11 1/8	19	18	1	65	12	232	217
PVH5800	34 5/16	42	45	19 3/4	19 3/4	17	28	5 1/2	25	13 1/2	13 1/4	13	3 5/16	11 1/8	19	18	1	65	12	232	217

DOWN DISCHARGE

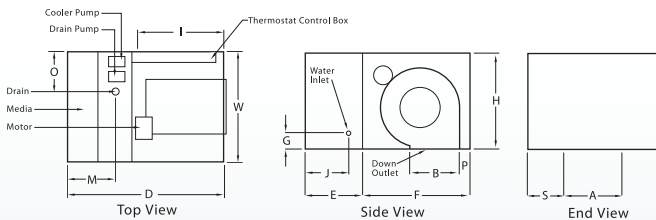

SIDE DISCHARGE

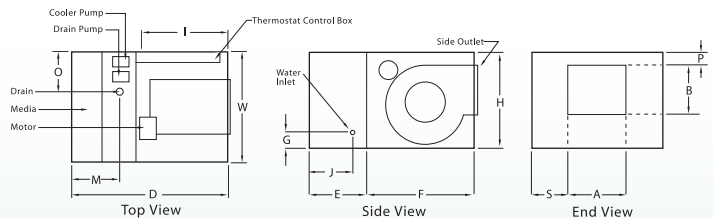

Phoenix Manufacturing Inc.
3655 East Roeser Road
Phoenix, Arizona 85040

Phone: 602-437-1034
Fax: 602-437-4833
phoenixmanufacturing.com

APROV_17_V01
MADE IN U.S.A.